


OMNIDECK™


Specification sheet

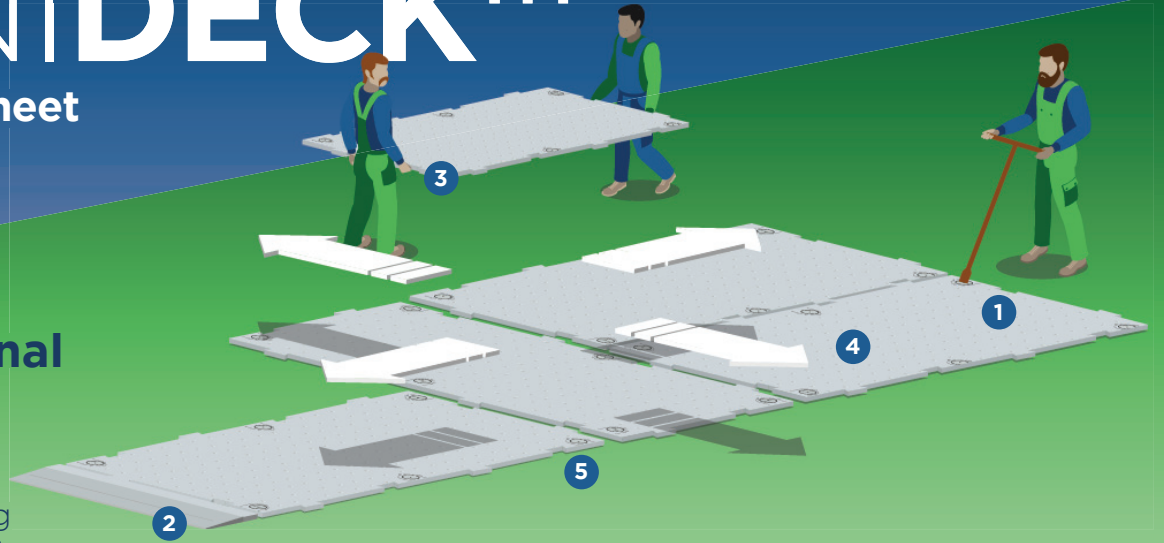

Omnidirectional Installation

Innovative design allows fast-deploying stadium turf protection.

Operationally Efficient	Schedule more events and spend fewer hours on setup while protecting people, equipment and your turf
Next-Gen Protection	<ul style="list-style-type: none"> • Weight load up to 600 psi or 86,400 psf, depending on subsurface conditions • High Density Polyethylene (HDPE) • Five-year UV package
Easy Access ①	Ability to remove single panel for access. Easily build system around walls, goal posts and more
Edge Ramps ②	Install 3' ADA compliant ramps along edges to meet disability requirements
Safety ③	Integrated hand holds make panels easy to carry and safe to store. Panels nest on pallet to prevent sliding
Shipping Information	48 ft. flatbed truck: 840 panels 40 ft. ISO shipping container: 648 panels 20 ft. ISO shipping container: 312 panels UK lorry: 868 panels
Slip Resistant Surface ④	Tread on top of panel increases traction
Stable & Secure Locks ⑤	<ul style="list-style-type: none"> • Rotating arm locks along all sides to secure panels • Visible lock indicators • T-bar tool
Colors	Available in translucent; custom colors available
Warranty	3-year manufacturer's limited warranty, including cam locks
Operating Temperature	-20 degrees to 140 degrees Fahrenheit (-29 to 60 Celsius)
Fire Rating	UL94HB, EN ISO / 1925 - 2: 2010

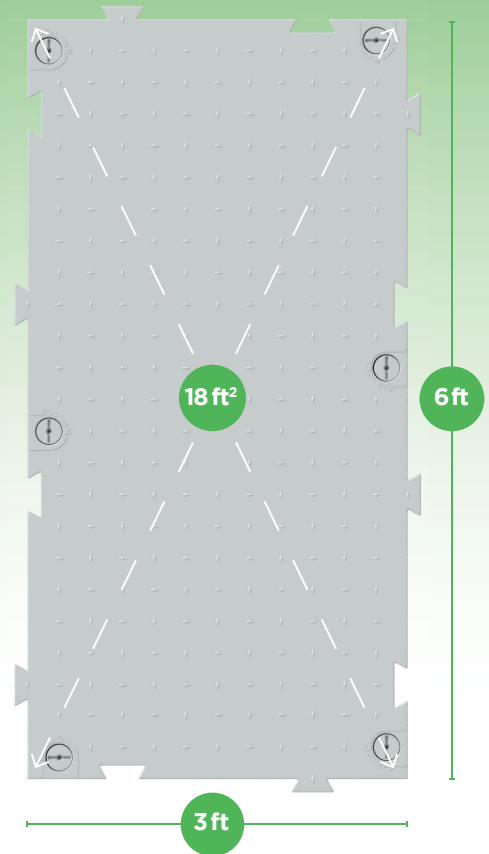

Size **6' L x 3' W x 1 1/2" H**
(183 x 91 x 3.81 cm)
Weight **50 lbs.** (22.7 kg)
Usable surface area **18 ft²** (1.67 m²)